

Brio Dual Set



DIGITAL SETTING: Cut_{in} + Cut_{off}

◆ Double setting


Adjustable **cut-in** and **cut-off** pressure from 1 to 6 Bar with a simple button

◆ 3 protections


- ◆ Dry running
- ◆ Automatic reset
- ◆ Pump anti-blockage

◆ All in one

- ◆ Pressure switch
- ◆ Pressure gauge
- ◆ 3 way hydraulic connection 1" GAS M
- ◆ Inspectionable check valve

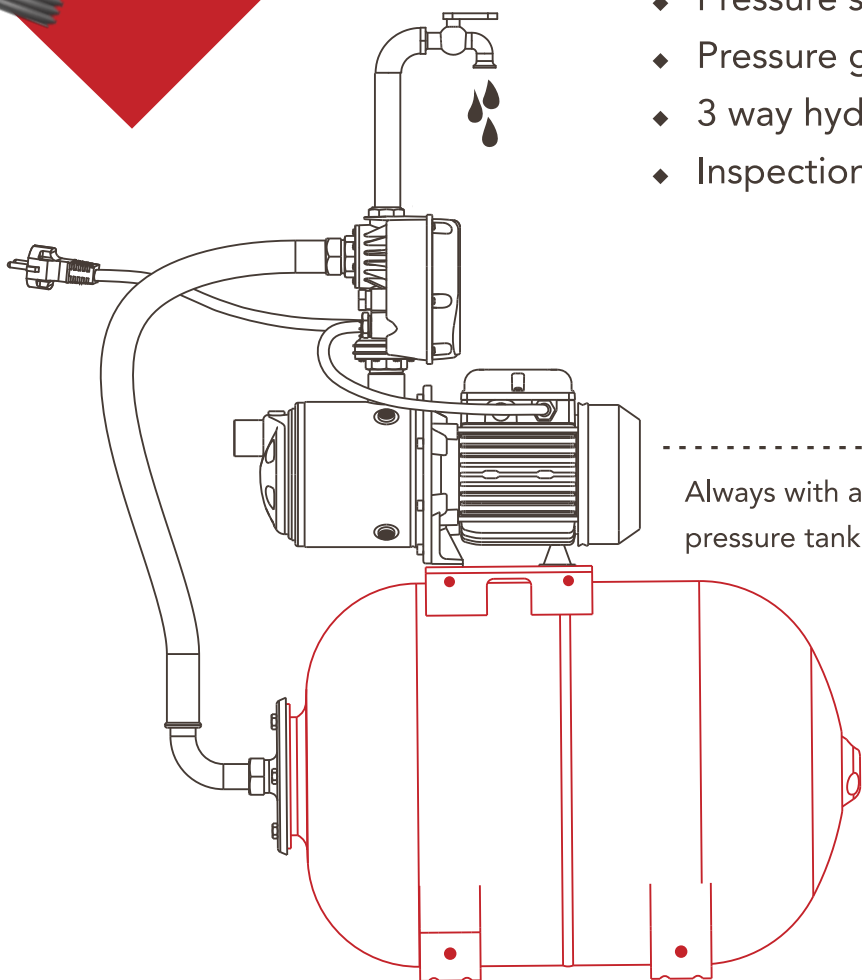

Always with a pressure tank

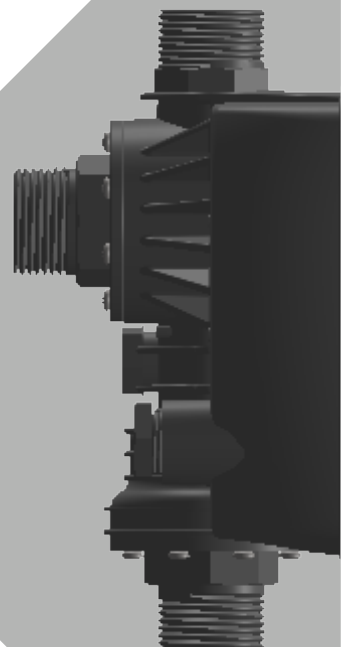

Protection degree	IP65	
Maximum pump current	10 A	
Power supply	115-230 V	
Maximum pressure	8 Bar	
Factory setting	Cut _{in} 1,5 Bar	Cut _{off} 3 Bar

TECHNICAL DATA

KEY FEATURES

Smart protection if the pump cannot reach the cut-off pressure


Automatic pump stop after 4 minutes when no flow is detected and the pressure is between cut-in and cut-off

Protection against continuous pump restarting

In case of continuous pump starts and stops caused by the loss of the tank's pre-charge pressure, the device stops the pump after more than 30 starts per minute

Settings
unlock/lock

Pressure setting
(Cut-in + Cut-off)

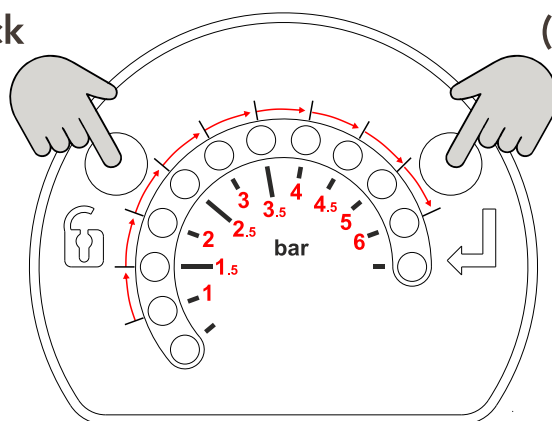

PRESSURE DIGITAL SETTING

